


Prosilica GB

1380

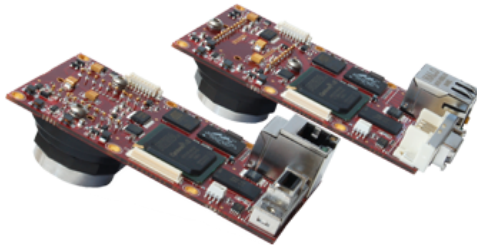

- Single board
- 30 fps @ full resolution
- Landscape or portrait sensor orientation
- Auto-iris (video type)

Description

1.4 Megapixel single-board GigE Vision camera - high sensitivity

Prosilica#GB1380 is a very sensitive, high-resolution CCD camera with Gigabit Ethernet interface. This camera incorporates the Sony ICX285 CCD sensor with EXview technology providing high-sensitivity, low noise, excellent anti-blooming, and superb image quality.

Options:


- CS-Mount
- Optical filters (IR cut filter/Protection glass)
- Portrait or landscape sensor orientation and in-line or vertical connector orientation

See the [#Modular Concept#](#) for lens mount, sensor orientation, and optical filter options.

Specifications

Prosilica GB	1380
Interface	IEEE 802.3 1000baseT
Resolution	1360 (H) × 1024 (V)
Sensor	Sony ICX285
Sensor type	CCD Progressive
Cell size	6.45 μm x 6.45 μm
Lens mount	C-Mount
Max frame rate at full resolution	30 fps
ADC	14 bit
Image buffer (RAM)	16 MByte
	Output
Bit depth	8/12 bit

Prosilica GB	1380
Mono modes	Mono8, Mono12, Mono12Packed
Color modes RGB	RGB8Packed, BGR8Packed
Raw modes	BayerRG8, BayerRG12, BayerGR12Packed
General purpose inputs/outputs (GPIOs)	
TTL I/Os	1 input, 1 output
Opto-isolated I/Os	1 input, 1 output
RS-232	1
Operating conditions/dimensions	
Operating temperature	0 °C to +70 °C
Power requirements (DC)	5 to 25 VDC
Power consumption (@12 V)	3.5 W
Mass	59 g
Body dimensions (L × W × H in mm)	51 × 89 (board size - W × L)
Regulations	CE (2004/108/EC), RoHS (2011/65/EU), WEEE (2002/96/EC), FCC Class A

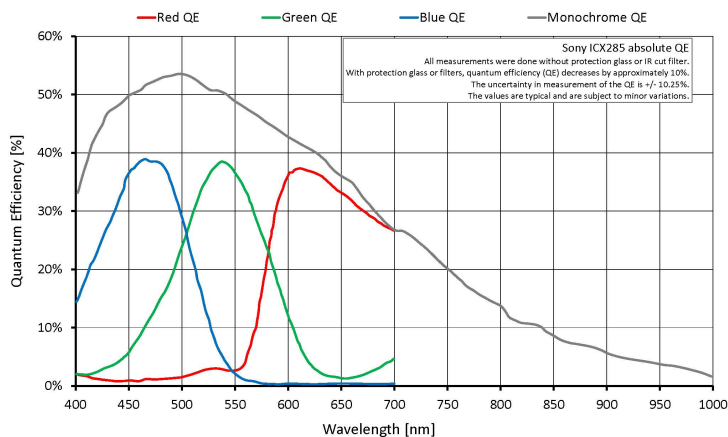

Features

Prosilica GB1380/GB1380C features include:

- Auto-iris (video type)
- Region of interest (ROI), DSP subregion (selectable ROI for auto features)
- Binning



- Auto gain (manual gain control: 0 to 30 dB)
- Auto exposure (manual exposure controls: 10 μ s to 78.5 s)
- Auto white balance
- StreamBytesPerSecond (easy bandwidth control)
- Stream hold
- Sync out modes: Trigger ready, input, exposing, readout, imaging, strobe, GPO
- Global shutter (digital shutter)
- Recorder and Multiframe acquisition modes
- Event channel
- Image chunk data
- Storable user sets

Applications

Prosilica GB1380/GB1380C is ideal for a wide range of applications including:

- Industrial inspection
- Machine vision
- Microscopy
- Ophthalmology
- Fluorescence
- Aeronautical and aerospace
- Public security
- Surveillance
- Traffic imaging