

# HT-16000-SBL Series

**HT-16000-SBL-M Monochrome**  
**HT-16000-SBL-C Color**

| Back-illuminated pixel structure



**GiGE**  
VISION

GEN<i>CAM

**Pregius S**

## HT-16000-SBL: 10GigE camera with Sony Pregius S IMX542

HT-16000-SBL features the Sony Pregius S IMX542 sensor. The Sony Pregius S technology features back-illuminated pixel structure that delivers distortion-free, high imaging performance and miniaturization. At full resolution (5320 x 3032) you get up to 52 frames per second. With its 10GigE RJ45 interface, sleek smaller case and CAT6A connection, this camera has the familiarity of GigE but with 10x the speed. Using CAT6A cabling, you can get cable lengths from 1 meter up to 100 meters. The HT-16000-SBL offers multi-camera synchronization at <math><1\mu\text{s}</math>, low CPU overhead, and excellent price-performance ratio.

### Benefits

- » High-speed 10GigE RJ45
- » 10x the speed of GigE
- » Ultra high data/frame rates
- » GigE Vision® and GenICam™ compliant
- » Back-illuminated pixel structure

### Applications






- » Industrial Inspection
- » Automation
- » Intelligent Transportation Systems
- » Logistics
- » Virtual Reality
- » Volumetric Capture
- » Referee Assist

### Specifications

Sensor	IMX542
Resolution	5320 x 3032
Megapixels	16.13MP
Sensor Type	1.1" CMOS
Max Frame Rate	52fps @ 8-bit 36fps @ 12-bit
Cell Size	2.74x2.74μm
Standard Mount	C Mount
Shutter	Global
Bit Depth	8 & 12 bit
GPIO / Triggering	3 in, 3 out Software, External (Pulse or Edge)
Interface	10GigE RJ45
Exposure/Integration*	5μs-1s
Dynamic Range	74 dB
Monochrome Modes	Mono8, Mono12, Mono12Packed
Color Modes	RGB8, BGR8, YUV411, YUV422, YUV444
Raw Modes	BayerRG8, BayerRG12, BayerRG12Packed
Operating System	Win10 (64 bit), Linux (64 bit)
Compliance	CE, FCC, RoHS, WEEE, GigE Vision, GenICam
Power Requirements	9W, 12V
Operating Temperature	0C - 45C
Storage Temperature	-30C to +60C
Dimensions & Weight	88 x 58 x 39 - 275g
Warranty	2 Years

\*all minimum exposure specs can vary from what is listed based on the limitations of each sensor as per notice from the manufacturer.

## Mechanical drawings

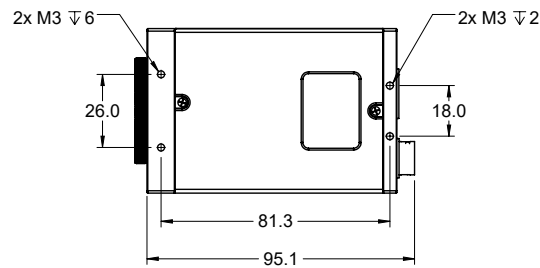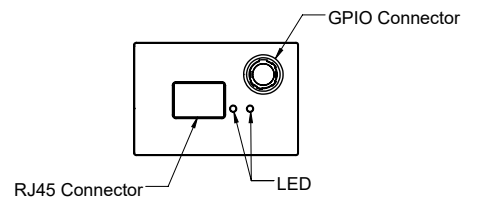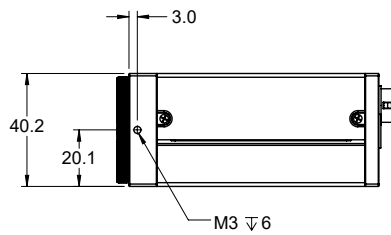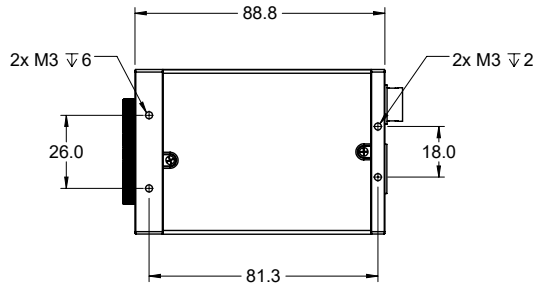

**Any Questions?**

1-866-780-6082

sales@emergentvisiontec.com