

SPEC. INFO	FL-CC5028-2M RC SPEC.	3135001-S001-RC-B13
		Oct. 04. 2012

1. Model FL-CC5028-2M
2. Application For 2/3 Format Camera

3. Specification

3-1. Physical (As per the attached drawing)

- (1) Dimensions  $\phi$  29.5 mm  $\times$  34.0 mm
- (2) Weight 55 g
- (3) Mount C-Mount (1 – 32 UN – 2A)
- (4) Filter Screw Size  $\phi$  27 mm , P = 0.5 mm

3-2. Optical

- (1) Focal Length 50 mm  $\pm$  5%
- (2) Max. Aperture Ratio 1: 2.8
- (3) Iris Range F / 2.8 to F / 22
- (4) Angle of View  
 Diagonal 12.53°  
 Horizontal 10.05°  
 Vertical 7.55°
- (5) Picture format 8.8 mm  $\times$  6.6 mm
- (6) Focusing Range Inf. to 0.9 m
- (7) Back Focal Length 21.03 mm (in air)
- (8) Flange Back Length 17.526 mm  $\pm$  0.05 mm (in air)

3-3. Mechanical

- (1) Focusing Mechanism Straight Helicoid  
 Rotation Angle 148.2°  
 Rotation Torque 0.2N·cm to 7.0 N·cm  
 Focus Ring can be fixed at any positions by 3 fixing screws (A) or 1 thumb screw (refer to external view)
- (2) Iris Mechanism Non-click, Close-down  
 Rotation Angle 81.5°  
 Rotation Torque 0.5N·cm to 7.0 N·cm  
 Iris Ring can be fixed at any positions by 3 fixing screws (B) or 1 thumb screw (refer to external view)

3-4. Vibration & Shock Test Standard

(1) Vibration Conditions

Wave	Sine Wave
Acceleration	1.96 m/s <sup>2</sup> to 59.78 m/s <sup>2</sup>
Cycle Range	10 Hz to 55 Hz
Cycle Period	3 Minutes
Duration of Vibration	120 Minutes Respectively in Three Dimensional Directions

(2) Shock Conditions

Tester	Shock Testing Machine by Dropping
Impact Force	588 m/s <sup>2</sup>
Duration of Shock	3.5 ms
Directions & Number of Times	1 Time Respectively in Three Dimensional Directions

<b>SPEC. INFO</b>	<b>FL-CC5028-2M RC SPEC.</b>	3135001-S001-RC-B23
		Oct. 04. 2012

3-5. Environmental Temperature Range       $-20^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$



4. Accessories

- |                                   |          |                      |
|-----------------------------------|----------|----------------------|
| (1) Front Lens Cap                | 1 piece  |                      |
| (2) Rear Lens Cap                 | 1 piece  |                      |
| (3) Fixing Screw ① for Focus Ring | 3 pieces |                      |
| (4) Fixing Screw ② for Iris Ring  | 3 pieces |                      |
| (5) Thumbscrew for Focus Ring     | 1 pieces | (for Optional Usage) |
| (6) Thumbscrew for Iris Ring      | 1 pieces | (for Optional Usage) |
| (7) Packing Box                   | 1 piece  |                      |

**RICOH** TV LENS 50 mm 1:2.8

0.9 1 5 1. 3 8 m

22-16 8 - 4 2.8 FL-CC5028-2M

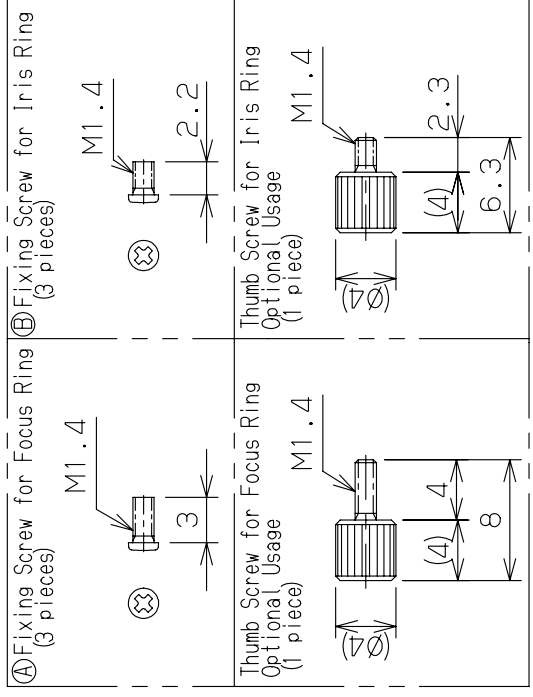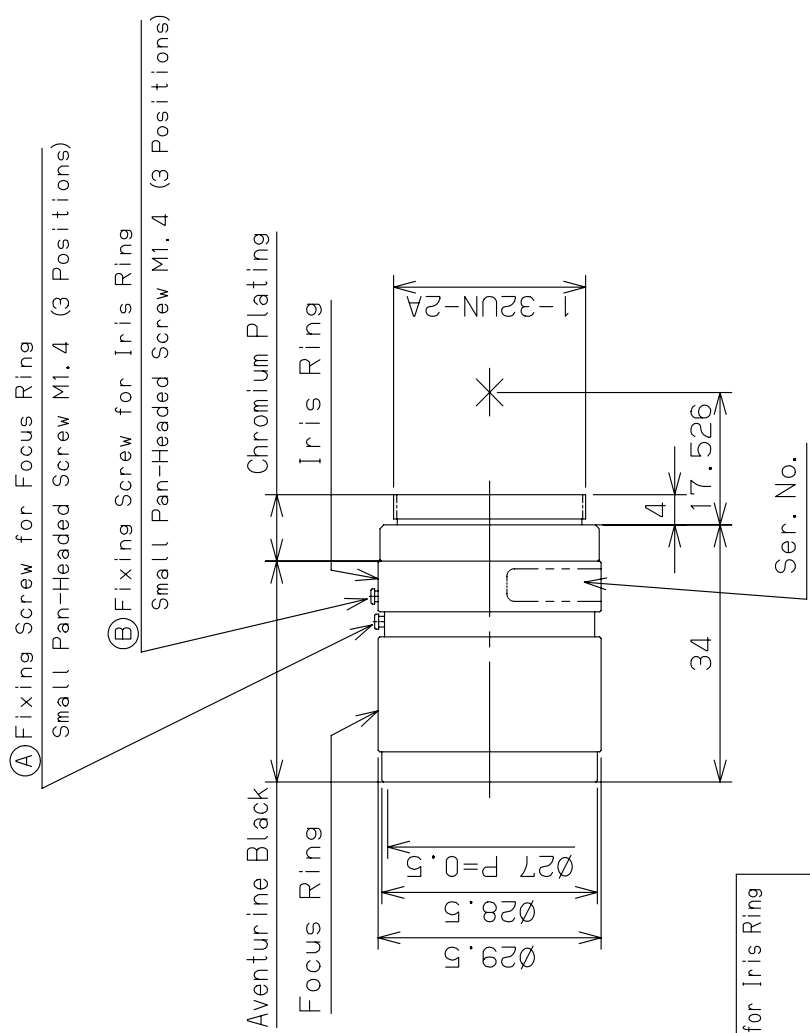

FL-CC5028-2M  
 3135001-S001-RC-B33  
 Oct.04.2012  
**SPEC. INFO**  
 RICOH