


Imagine the invisible


Modules & Components

XTM-640-BT.656

High resolution uncooled thermal OEM module

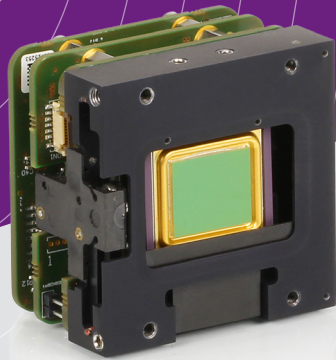

Ready-to-integrate thermal OEM module consuming ultra-low-power

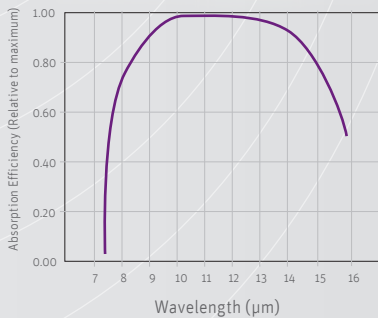

Xenics' XTM-640-BT.656 is an extremely compact and versatile thermal camera module with unique image quality and stability for a broad range of OEM applications. These applications include security, night vision, firefighting, airborne and land-based reconnaissance and surveillance.

You can easily integrate our XTM-640-BT.656 into your system with the universal Samtec QTE connector, which gives you 8 bit video data according to the BT.656 standard. This allows you immediate connection, data acquisition, command and control.

We guarantee you a high operating temperature range and unparalleled uniform and crisp thermal images thanks to on-board image processing and full shutter control.

The 640 x 480 image resolution with small pixel pitch of 17 µm allows for longer Detection, Recognition and Identification (DRI) values in critical security applications.

Designed for use in



Thermal security



Vision enhancement



Police surveillance



Border security


Key features

- Low power
- High resolution
- Easy connectivity
- Small size, 17 µm pixel pitch
- 50 Hz frame rate worldwide


OEM applications

- UAV / UGV
- Gimbal
- Night vision
- Thermal sights
- Border security
- Fire fighting
- Driver assistance
- Police surveillance
- Search & Rescue (SAR)
- Electro optical payloads


Lens & filter options



> Discover our Lens Selector Guide
www.xenics.com/LSG



Inputs



Samtec QTE

Outputs

Specifications

Module specifications	XTM-640-BT.656
Lens	
Optical interface	Fixation holes for multiple lens mount
Imaging performance	
Frame rate (full frame)	25 or 30 Hz (configurable)
Window of Interest	Minimum size 160 x 120
Integration time	1 μ s - 80 μ s
Shutter	Full control by serial command
Temperature stabilization	No ThermoElectric Cooling required (TEC-less)
Integration type	Rolling shutter
On-board image processing	NUC (Non-Uniformity Correction) Auto-offset & Auto-gain (selectable region of interest) XIE (Xenics Image Enhancement) Histogram equalization Digital zoom
A to D conversion resolution	16 bit
Interfaces	
Connector	Samtec QTE
Video output	ITU-R BT.656
Analog output	-
Module control	XSP protocol
Trigger	In or out (configurable via Samtec)
Power requirements	
Power consumption	1.65 W
Power supply	3.3 V
Physical characteristics	
Shock	40 g, 11 ms according to MIL-STD810G
Vibration	5 g (20 Hz to 2000 Hz) according to MIL-STD883J
Ambient operating temperature	- 40 °C to 60 °C
Storage temperature	- 45 °C to 85 °C
Dimensions (W x H x L mm ³)	45 x 45 x 35.8
Weight module	75 g

Array specifications	XTM-640-BT.656
Array type	Uncooled microbolometer (a-Si)
Spectral band	8 to 14 μ m
# pixels	640 x 480
Pixel pitch	17 μ m
NETD	55 mK @ 30°C with F/1 lens
Array cooling	Uncooled
Pixel operability	> 99 %

Product selector guide

Part number	NETD (mK)	Frame rate (Hz)	QTE Interface
XEN-000299	55	25 or 30	BT.656
XEN-000446		9	

XB-050 issue 04 | Information furnished by Xenics is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. This information supersedes all previously supplied information.