

## 1 Supporting documents



**NOTE:**  
The following documents are available for download on our website. Only the documents currently available on the website are valid.

- Catalog
- Drawings, performance data, information about accessory parts, etc.
- Technical data (data sheets)
- General terms and conditions, including warranty information


## 2 Proper use



**NOTE:**  
The GP200 series gripper is only to be used in its original state with its original accessories, with no unauthorized changes and within the scope of its defined parameters for use. Zimmer GmbH shall accept no liability for any damage caused by improper use.

The gripper is designed for operation with compressed air only. It is not suited for operation with other media such as liquids or gases. The gripper is used as defined under "Proper use" in enclosed rooms for time-restricted gripping, handling and holding workpieces. It is not suitable for clamping workpieces during a machining process or for direct contact with perishable goods.

Proper use of the gripper also includes the forces and torques that may be acting in addition to the gripping force. (See product data sheets at [www.zimmer-group.com](http://www.zimmer-group.com))



## 3 Personnel qualifications

Installation, commissioning and maintenance may only be performed by qualified personnel. These persons must have read and understood the installation instructions in full.

## 4 Safety notes

- Installation, commissioning, maintenance and repairs may only be performed by qualified experts in accordance with these installation and operating instructions.
- The gripper is state-of-the-art. It is fitted to industrial machines and is used to hold workpieces. The following are examples of situations in which the gripper may cause a hazard the gripper is not properly fitted, used or maintained
  - the gripper is not used for its intended purpose
  - failure to observe the local regulations (legislation, guidelines, directives), such as the EC Machinery Directive,
  - the Accident Prevention Regulations and the assembly and operating instructions
  - The gripper may be used only in accordance with its proper use and technical data ZIMMER GmbH shall accept no liability for any damage caused by improper use.
- Any use other than the proper use requires written approval from Zimmer GmbH
- Do not reach into the operating range of the gripper.
- Make sure that the energy supply is disconnected and before you install, retool, maintain or repair the gripper.
- In case of maintenance, renovation or expansion work, remove the gripper from the machine and carry out the work outside the danger zone.
- When commissioning or testing, make sure that the gripper cannot be actuated by mistake.
- Modifications to the gripper, such as adding drill holes or threads, may be made only with prior approval from Zimmer GmbH.
- The specified maintenance intervals and compressed air quality specifications are to be observed; also refer to the Maintenance section. Please contact our hotline for this purpose.
- Use of the gripper under extreme conditions, such as aggressive liquids and abrasive dust, is subject to prior approval from Zimmer GmbH
- When disassembling grippers with integrated springs, exercise increased caution because spring tension is always present.
- When disassembling grippers with integrated springs, exercise increased caution because spring tension is always present.

## 5 Function

The function relies on the action of a pneumatic piston vented on both sides. Alternating ventilation moves the pneumatic piston up and down. The energy generated in this process is transferred to the gripper jaws by kinematics, producing the gripping force. The spring used in the cylinder chamber for the GP2□□ design acts as an energy accumulator and gripping force safety device.

①	<b>Stroke adjustment</b> Infinitely adjustable in "open" movement adjusting screw in delivery
②	<b>Wedge hook mechanism</b> Synchronized the movement of the gripper jaws high force transfer
③	<b>Square guide</b> High forces an moments capacity
④	<b>Gripper jaw</b> Individual gripper finger mounting
⑤	<b>Mounting and positioning</b> Mounting possible from several sides for versatile positioning
⑥	<b>Sensing slot</b> Mounting and positioning of magnetic field sensors
⑦	<b>Drive</b> double-acting pneumatic cylinders
⑧	<b>Energy supply</b> Possible from several sides

Fig. 1: GP200 gripper


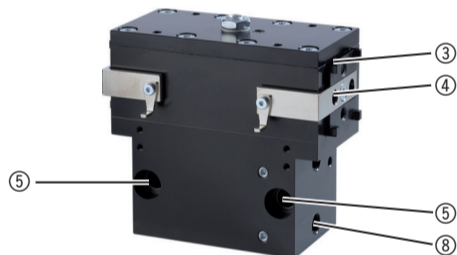


Fig. 2: GP200 gripper cross-section



## 6 Installation

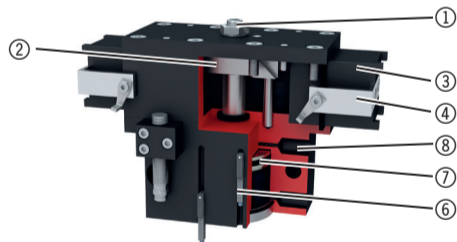

**WARNING:**  
Risk of injury in case of unexpected movement of the machine or system into which the gripper is being installed.  
▶ Switch off the energy supply to the machine before all work  
▶ Secure the machine against being switched on unintentionally  
▶ Check the machine for any residual energy



**CAUTION:**  
Risk of injury in case of unexpected movement of the gripper when pneumatic energy is connected.  
▶ Switch off the pneumatic energy before all work  
▶ Secure the pneumatic circuit against being switched on unintentionally  
▶ Check the pneumatic circuit for any existing residual energy; bleed if necessary

### 6.1 Installing the gripper

The gripper can be fitted on a mounting surface from several sides with the necessary evenness.

Length of the mounting surface [mm]	Permitted unevenness [mm]
<100	<0,02
>100	<0,05

Two alternative options are available for the installation of the gripper:

Mounting position	Connection
Base plate	⑩
Mounting flange	⑪

The dimensional drawing for the GP240 is shown as an example in the adjacent image.

Two alternative options are available for the installation of the gripper:

- Mounting on the housing floor from below through the mounting piece ⑩.
- Mounting on the mounting piece laterally through the housing ⑪.

The dimensions for the design of the mounting piece can be found on the respective data sheet on our website.

You can download any necessary CAD data in all common formats from our website: <http://www.zimmer-group.com>

Make the following selections:

Handling technology/grippers/pneumatic/2-jaw parallel grippers/GP200 series


Refer to the data sheets for the number and size of the necessary mounting screws. The corresponding tightening torques are summarized in the following table.

Screw size		M3	M4	M5	M6	M8	M10	M12	M14	M16
Permitted tightening torque	[Nm]	1,3	2,9	6,0	10,2	24,9	49,5	86,3	138,0	214,9

### 6.2 Installation of the connecting flanges

The pneumatic connections ② are located on the outer edge of the housing. An alternative connection option is located on the base plate of the housing ⑫.

Connection A ②	Closes the gripper
Connection B ②	Opens the gripper
Connection A' (alternative) ⑫	Closes the gripper
Connection B' (alternative) ⑫	Opens the gripper

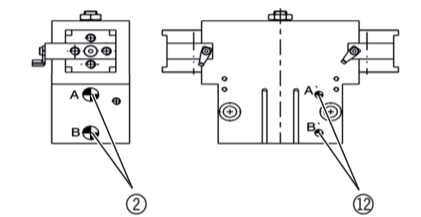

**NOTE:**  
Close off unused pneumatic connections with dummy plugs.

For the available pneumatic connections, refer to the accessories list on the product data sheets on our website. You can also find the necessary ordering information there.

### 6.3 Installing the gripper fingers and accessories



**NOTE:**  
Before installing the clamping jaws bq, make sure they are of a suitable length for the selected gripper variant.

- Secure the gripper jaws at the designated positions ⑪ using centering pins and cylinder screws of strength class 8.8.

Inductive proximity switch:

- Install the mounting block ⑬ on the gripper.
- Insert the inductive proximity switch ⑭ into the mounting block ⑬ and tension it.
- Adjust the switch cams ③.

⇨ Switching distance: 1.50 mm.


⇨ Refer also to the inductive proximity switch data sheet.

Magnetic field sensor:

- Position and insert the magnetic sensors ⑮ into the designated slots ⑬ and tension them in the slots.

Centering ring

- As a positioning aid, insert the centering ring ⑯ in the ring-shaped recess at the bottom of the gripper.

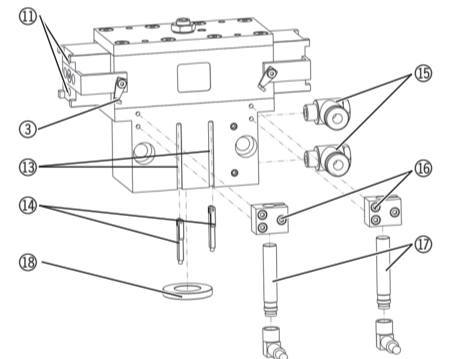

## 7 Technical data

These multi-page data sheets (see example image to the right) contain the following:

- a product description
- the technical data
- a dimensional drawing
- the available accessories



**INFORMATION:**  
Please gather the technical data from our website [www.zimmer-group.com](http://www.zimmer-group.com). This data varies within the series depending on the specific design. If you should have further questions on products or on technical data, please contact ZIMMER GmbH customer service.

## 8 Maintenance

Maintenance-free operation of the gripper is guaranteed for up to 10 million gripping cycles.

The maintenance interval may shorten under the following circumstances:

- Operation with compressed air that does not comply with DIN ISO 8573-1 quality class 4
- Dirty environment
- Improper use and use that does not comply with the performance data
- Ambient temperature of more than 60°C; lubricants harden faster!

We recommend using the Zimmer GmbH repair service for maintenance and the replacement of seals.

Dismantling and reassembling the gripper without authorization may result in complications, as special installation equipment is required in some cases.

## 9 Declaration of incorporation

In terms of the EU Machinery Directive 2006/42/EC (Annex II 1 B)

**Name and address of the manufacturer:**

ZIMMER GmbH • Im Salmenkopf 5 • D-77866 Rheinau, Germany • Phone: +49 7844 9138 0 • Fax: +49 7844 9138 80  
[www.zimmer-group.de](http://www.zimmer-group.de)

**We hereby declare that the incomplete machine described below**

**Product designation:** Pneumatic gripper  
**Type designation:** GP2□□□

**satisfies the following basic requirements of the Machinery Directive 2006/42/EC**

No. 1.1.2., No. 1.1.3., No. 1.1.5., No. 1.3.2., No. 1.3.4., No. 1.3.7., No. 1.5.3., No. 1.5.4., No. 1.5.8., No. 1.6.4., No. 1.7.1., No. 1.7.4.

We also declare that the specific technical documents were produced in accordance with Annex VII Part B of this Directive.

We undertake to provide the market supervisory bodies with electronic versions of special documents for the incomplete machine through our documentation department, should they have reason to request them.

**The incomplete machine may only be commissioned if the machine or system in which the incomplete machine is to be installed has been determined to satisfy the conditions of the Machinery Directive 2006/42/EC and the EC Declaration of Conformity has been produced in accordance with Annex II 1 A.**

**Authorized representative for compiling the relevant technical documents**

Kurt Ross *siehe Adresse des Herstellers* Rheinau, den 04.05.2015 *Martin Zimmer, Geschäftsführer*  
First name, last name Address (Place and date of issuance) (Legally binding signature)