
2-JAW ANGULAR GRIPPERS **INSTALLATION SIZE MGW803**

▶ PRODUCT SPECIFICATIONS



Gripping force diagram



Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	0.4
My [Nm]	0.4
Fa [N]	90

► INCLUDED IN DELIVERY



Centering Disc

DST80320

► RECOMMENDED ACCESSORIES



Magnetic field sensor Angled Cable 5 m

MFS103KHC



Magnetic field sensor Angled Cable 0,3 m -

MFS103SKHC



Magnetic field sensor Straight Cable 5 m

MFS204KHC



Magnetic field sensor Straight Cable 0,3 m -

MFS204SKHC



Straight Fittings - Barb Style Connection

GVM3



Angled Fittings - Barb

WVM3




Quick Exhaust Valve

DEV04


	► Technical Data*	
Order no.	MGW803N	MGW803NC
Stroke per jaw [°]	37.5	37.5
Gripping moment in closing [Nm]	0.2	0.3
Gripping moment in opening [Nm]	0.23	
Gripping moment secured by spring min. [Nm]		0.1
Gripping force in closing [N]	33	49
Gripping force in opening [N]	38	
Closing time [s]	0.01	0.01
Opening time [s]	0.01	0.02
Repetition accuracy +/- [mm]	0.05	0.05
Operating pressure min. [bar]	3	4
Operating pressure max. [bar]	8	8
Operating temperature min. [°C]	5	5
Operating temperature max. [°C]	+80	+80
Air volume per cycle [cm³]	0.64	1
Weight [kg]	0.025	0.04

^{*}All data measured at 6 bar

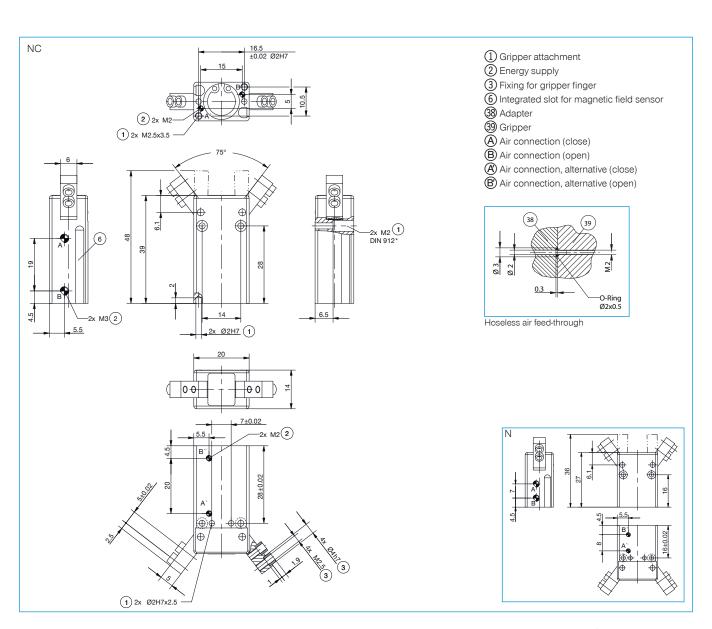

2-JAW ANGULAR GRIPPERS **SERIES MGW800**

PRODUCT ADVANTAGES

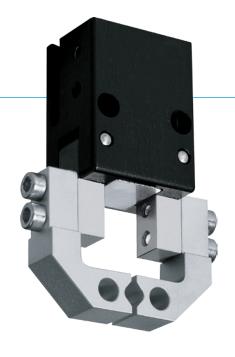

"The economical"

Concentration on the essentials

The most economic type of gripping: This is how you reduce your production costs

High moment load

The optimally designed angular gear box provides the highest durability for your application

► Failure-free continuous operation

Our uncompromising "Made in Germany" quality guarantees up to 10 million maintenance-free cycles

> THE BEST PRODUCT FOR YOUR APPLICATION



Our products welcome the challenge!

Extreme conditions, all over the world—our tried and tested components and systems give you endless possibilities. Find the best product for your specific use: www.zimmer-group.de


HOW TO ORDER CORRECTLY

The product order numbers are arranged according to this diagram:

Order no.	MGW803N		
For external gripping, self-locking, spring closing		С	



BENEFITS IN DETAIL



- 1 Gripper jaw
 - individual gripper finger mounting
- 2 Robust, lightweight housing
 - Hard-coated aluminum alloy
- (3) Position sensing
 - permanent magnet for direct monitoring of piston movement
- 4 Integrated gripping force safety device
 - spring integrated into cylinder as energy storage (from size 803 upwards)
- 5 Mounting and positioning
 - mounting possible from several sides for versatile positioning
- 6 Energy supply
 - possible from several sides
- 7 Sensing slot
 - mounting and positioning of magnetic field sensors
- 8 Removable centering sleeves
 - quick and economical positioning of the gripper fingers

SERIES CHARACTERISTICS



Number of installation sizes	8
Stroke per jaw	37,5°
Gripping force	5 N - 325 N
Weight	0,01 kg - 0,45 kg
AP class	2



10 million maintenance-free cycles (max.)



Spring closing C



IP30



Magnetic field sensor