

# HT-30000-S Series

**HT-30000-S-M Monochrome**

**HT-30000-S-C Color**



**GiGE**  
VISION

**GEN<i>i>CAM**

## HT-30000-S: 10GigE camera with Sony IMX342

HT-30000-S features the Sony IMX342 CMOS sensor. At full resolution (6464 x 4852), you get up to 35 frames per second. With its 10GigE RJ45 interface, sleek smaller case and CAT6A connection, this camera has the familiarity of GigE but with 10x the speed. Using CAT6A cabling, you can get cable lengths from 1 meter up to 100 meters. The HT-30000-S offers multi-camera synchronization at <1μs, low CPU overhead, and excellent price-performance ratio.

### Benefits

- » High-speed 10GigE RJ45
- » 10x the speed of GigE
- » Ultra high data/frame rates
- » GigE Vision® and GenICam™ compliant

### Applications


- » Virtual Reality
- » Volumetric Capture
- » LCD Inspection
- » Immersive 3D Content
- » Finish Line Vision
- » Referee Assist

## Specifications



Sensor	IMX342
Resolution	6464 x 4852
Megapixels	31.36MP
Sensor Type	APS-C (4:3) CMOS
Max Frame Rate	35fps @ 8-bit 25fps @ 12-bit
Cell Size	3.45x3.45μm
Standard Mount	52mm, M52x1.5x12mm BFL, F-mount Available
Shutter	Global
Bit Depth	8 & 12 Bit
GPIO / Triggering	3 in, 3 out Software, External (Pulse or Edge)
Interface	10GigE RJ45
Exposure/Integration*	35μs - 1s
Dynamic Range	71 dB
Monochrome Modes	Mono8, Mono12, Mono12Packed
Color Modes	RGB8, BGR8, YUV411, YUV422, YUV444
Raw Modes	BayerRG8, BayerRG12, BayerRG12Packed
Operating System	Win10 (64 bit), Linux (64 bit)
Compliance	CE, FCC, RoHS, WEEE, GigE Vision, GenICam
Power Requirements	8W, 12V
Operating Temperature	0C - 45C
Storage Temperature	-30C to +60C
Dimensions & Weight	88 x 58 x 60 - 405g
Warranty	2 Years

\*all minimum exposure specs can vary from what is listed based on the limitations of each sensor as per notice from the manufacturer.

## Mechanical drawings

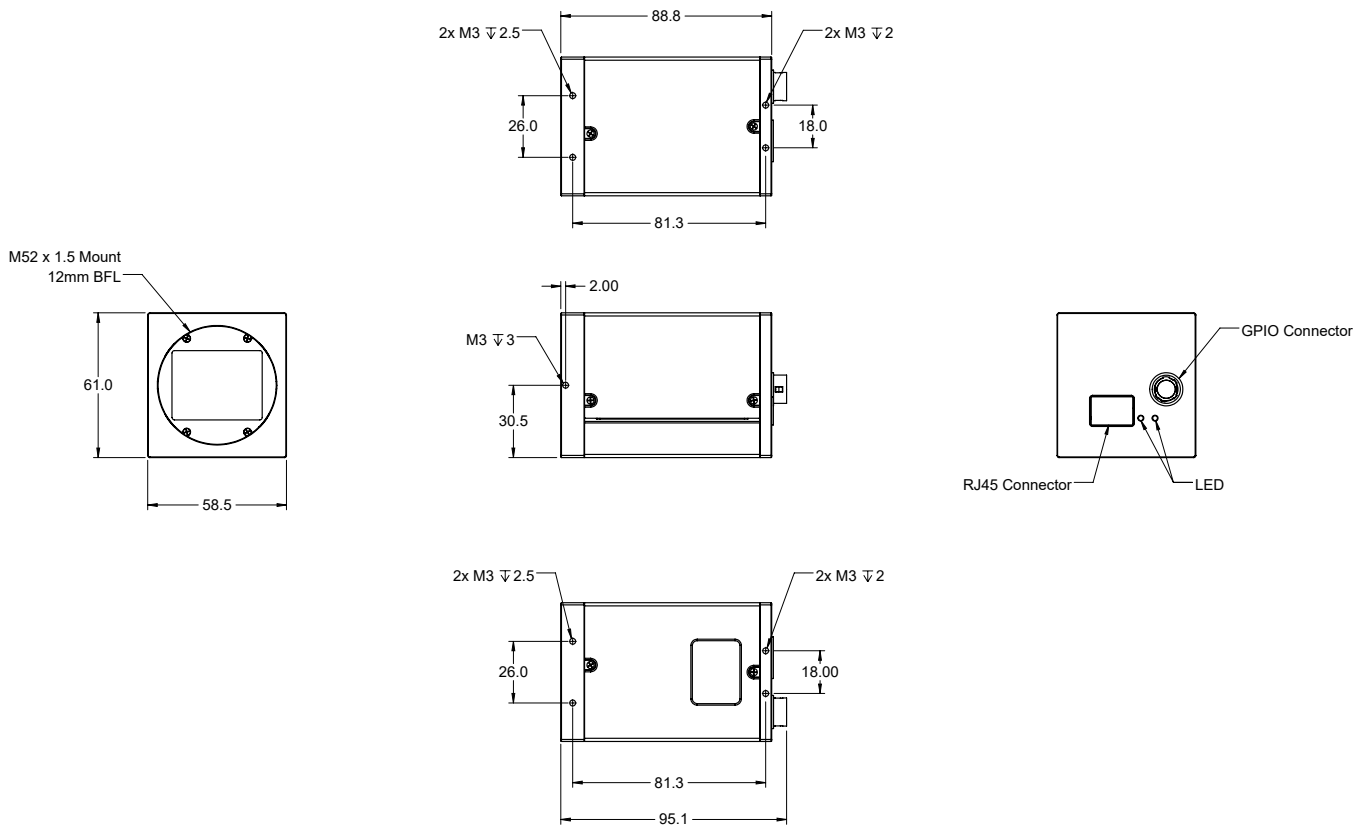

## Spectral Sensitivity

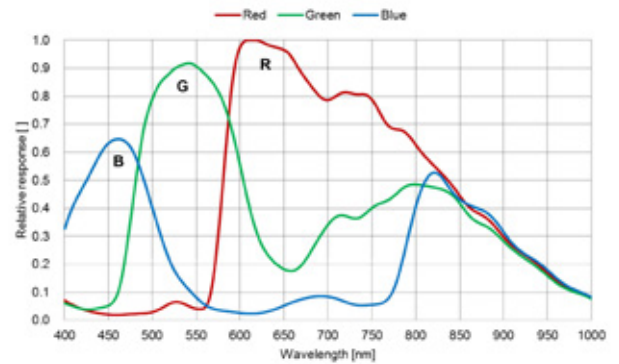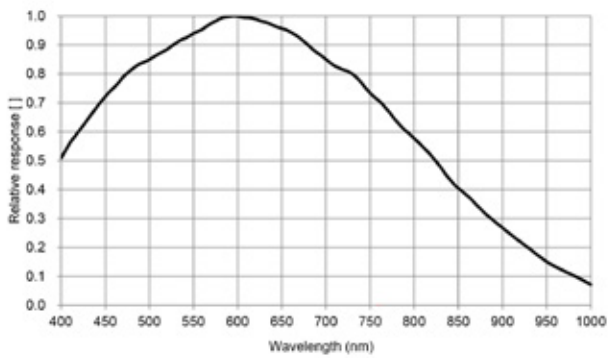

Any Questions?

1-866-780-6082

sales@emergentvisiontec.com